


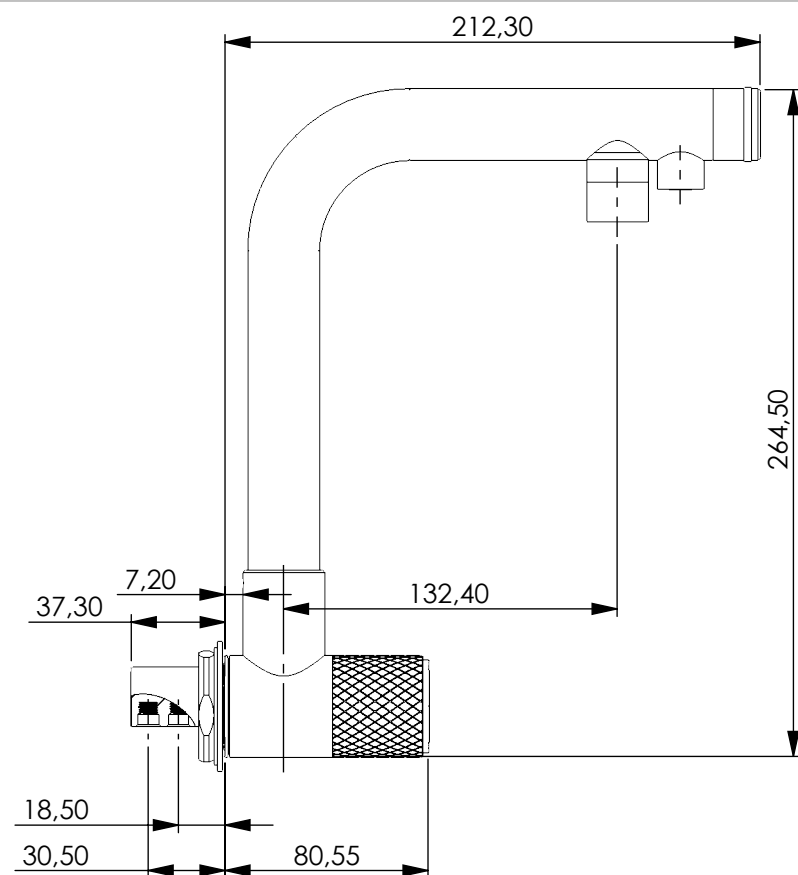
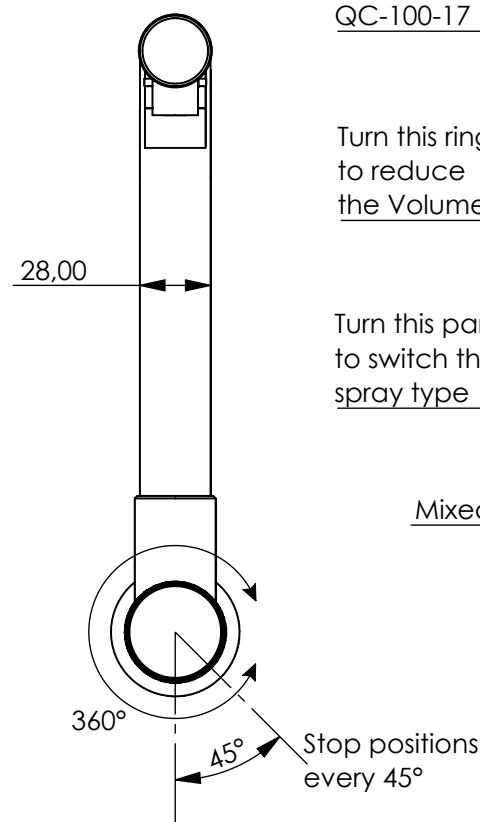


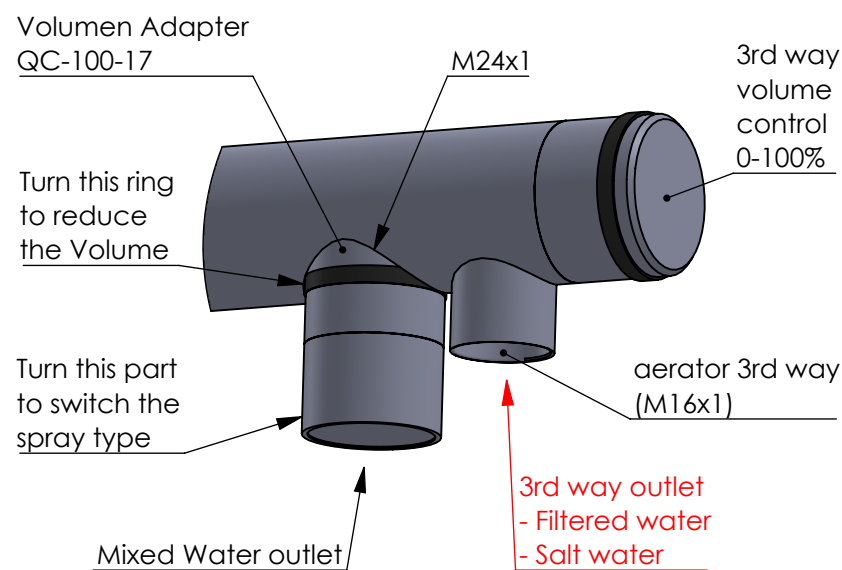


Flex hoses comes with double use connection:
- 10mm hose bulb
- 12mm fast connect system

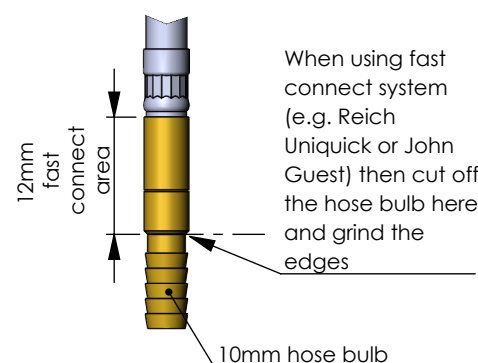


When using fast connect system (e.g. Reich Uniquick or John Guest) then cut off the hose bulb here and grind the edges

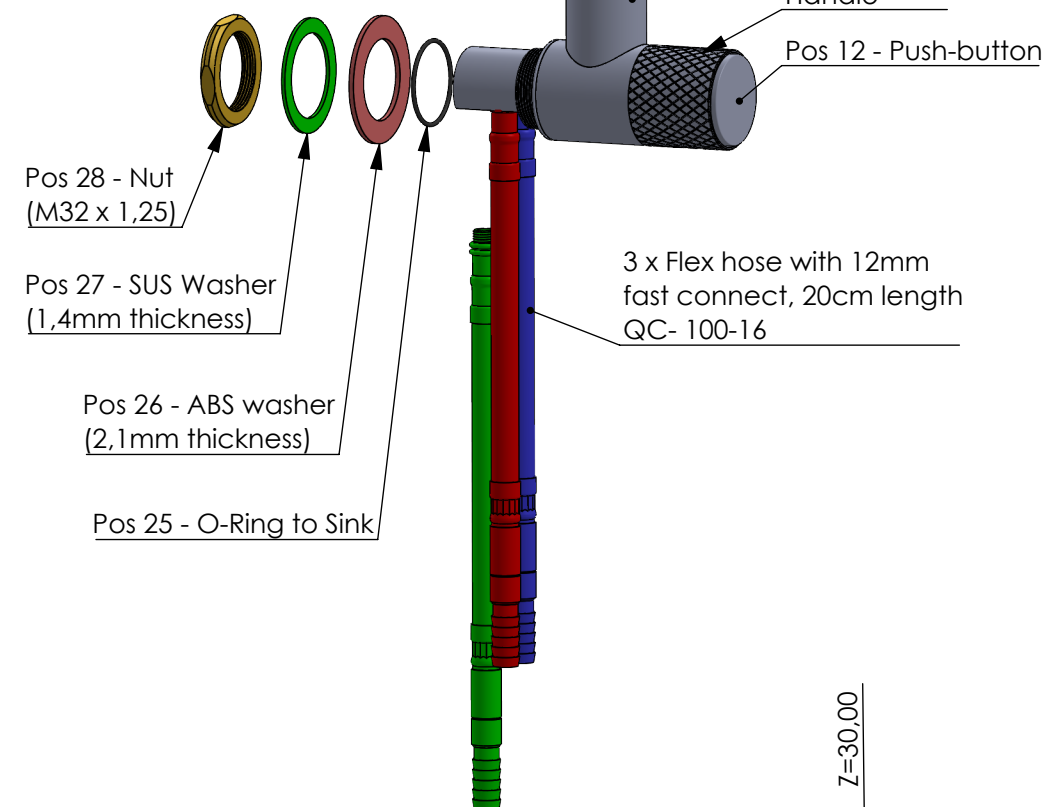

Maximum wall thickness

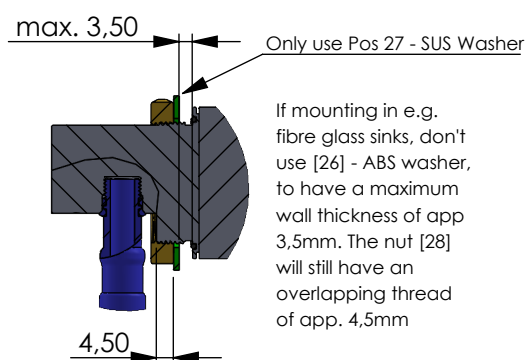

If mounting in e.g. fibre glass sinks, don't use [26] - ABS washer, to have a maximum wall thickness of app 3,5mm. The nut [28] will still have an overlapping thread of app. 4,5mm

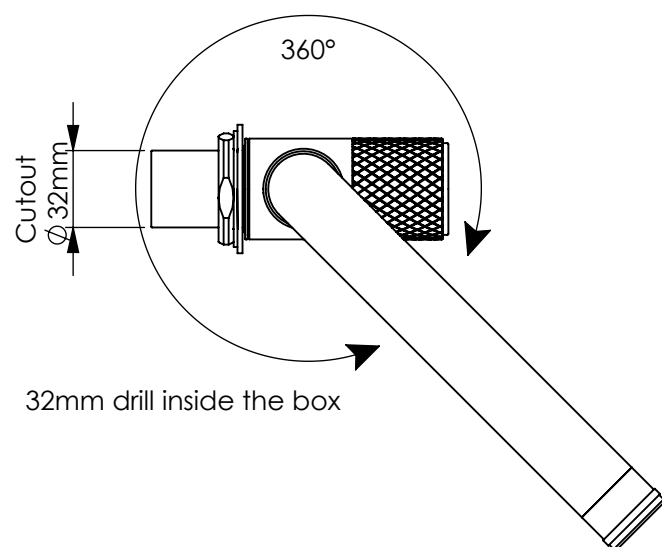


Mounting positions with Queensize Camper sinks

Sink 400x340mm
8 possible positions

Sink 340x290mm
8 possible positions

Sink 340x220mm
4 possible positions

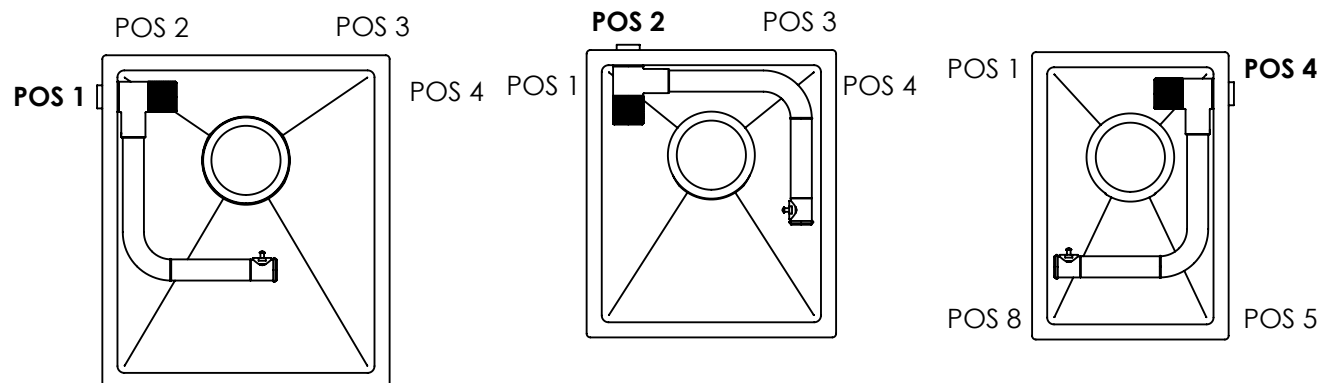

In case of frost: To prevent damage caused by freezing water, the water must be drained from the faucet, otherwise there is a risk of damage to the cartridge and spout!
1. Open both cartridges and set it to the middle position
2. Fold the spout into the sink so that all the water can run out of the spout (it is best to unscrew the aerator!).
3. Blow through the water pipes from the pump side

Mounting recommendation:
z = minimum 30mm (center to top)
x = app. 35mm (center to wall)

INFO: Make sure you check the position twice before your drill, check tabletop position (undermount/Topmount)

weight: app 1220g
Material SUS 316 (A4)



Queensize Camper GmbH
Alte Mühle 22d,
22395 Hamburg, Germany

Date	10.12.2025	Name	C. Weiss	Revision	V1
Title	3 Way Folding Faucet Deluxe				
Project	HAN QC-100-07				
Document No	251210_QC-100-07_Overview_EN_V2				