


Roam Series

Multi-Power Outlet • 12V Power • Dual USB-C • Anderson 50A • Dual SAT

SC-R-M1

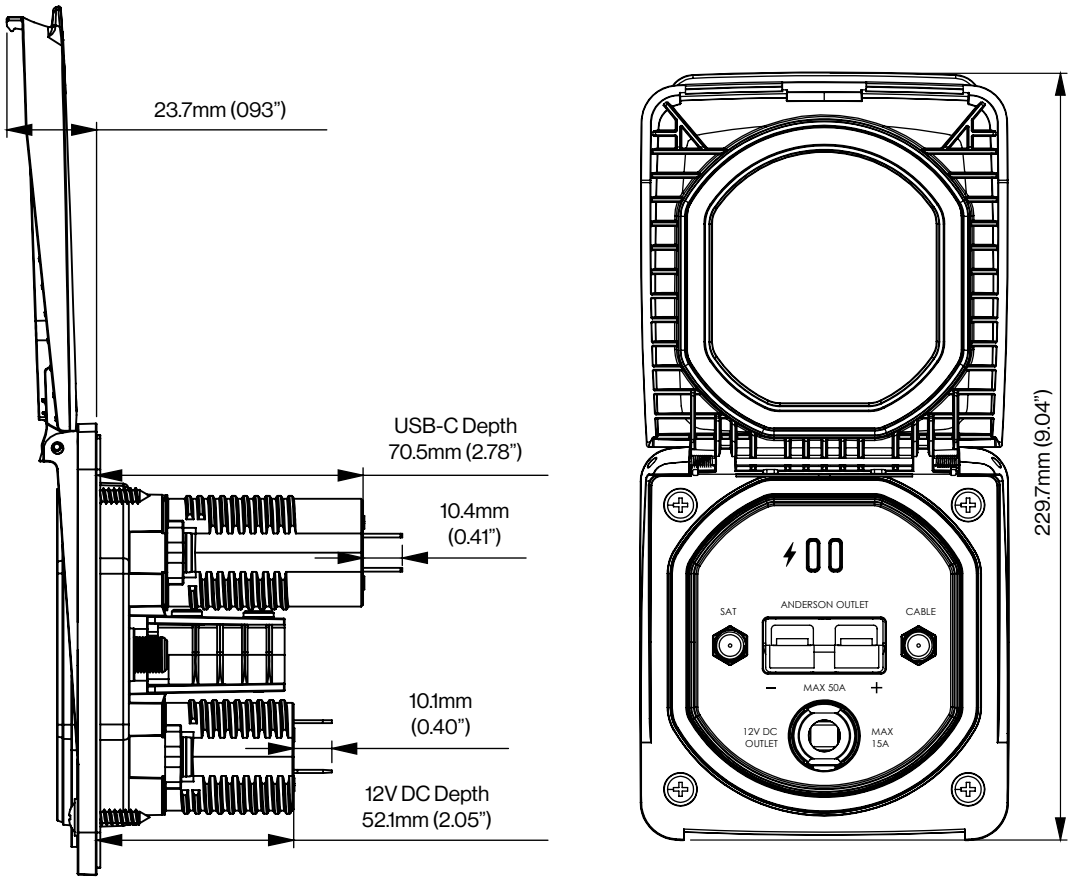

Full set of technical drawings overleaf

Technical Information

12V Power Outlet	
Input Voltage (12V System)	10-15V DC
Input Current Max	15A
Output Max	225W
Standby Draw	0.01W
⚠ 15A/225W: 30 Mins Max	
Dual USB-C	
Input Voltage (12/24V System)	10-32V DC
Input Current Max	6A
Output Type C (12V System)	5V≡3A, 9V≡3A, 12V≡3A Max
Output Type C (24V System)	5V≡3A, 9V≡3A, 12V≡3A, 15V≡3A, 20V≡3A Max
Standby Power Draw	0.01W
Anderson 50A DC Connection	
Connection Type	Anderson SB50 - Grey
Compatible Connector	Rated 50A (6AWG cable)
Connector Max Current	Rated 50A (6AWG cable)
Connector Max Voltage	Rated 600V DC
Max Power Delivery (12V System)	600W
Max Power Delivery (24V System)	1200W
Max Power Delivery (48V System)	2400W
SB50 terminal crimps are not included. Only genuine Anderson Power connectors and terminal crimps should be used with this product and are available from Anderson Power.	
Sizes available:	
• 6AWG/16mm² (Part number - 5900)	
• 8AWG/10mm² (Part number - 5952)	
• 12-10AWG/4mm²-6mm² (Part number - 5915)	
SAT Connection	
Connection Type	Dual F-Type Coaxial
Dual F-Type Coaxial	Nickel-Plated Brass
Impedance	75Ω
Applications	Satellite & TV Systems
Product Approvals	
Waterproof Rating	IP68, IP69K Front only when lid closed
Certifications	CE, FCC, C-Tick, ROHS, WEEE

SCANSTRUT.


sales@scanstrut.com • usasales@scanstrut.com

TEC-007572

Roam Series

Multi-Power Outlet • 12V Power • Dual USB-C • Anderson 50A • Dual SAT

SC-R-M1

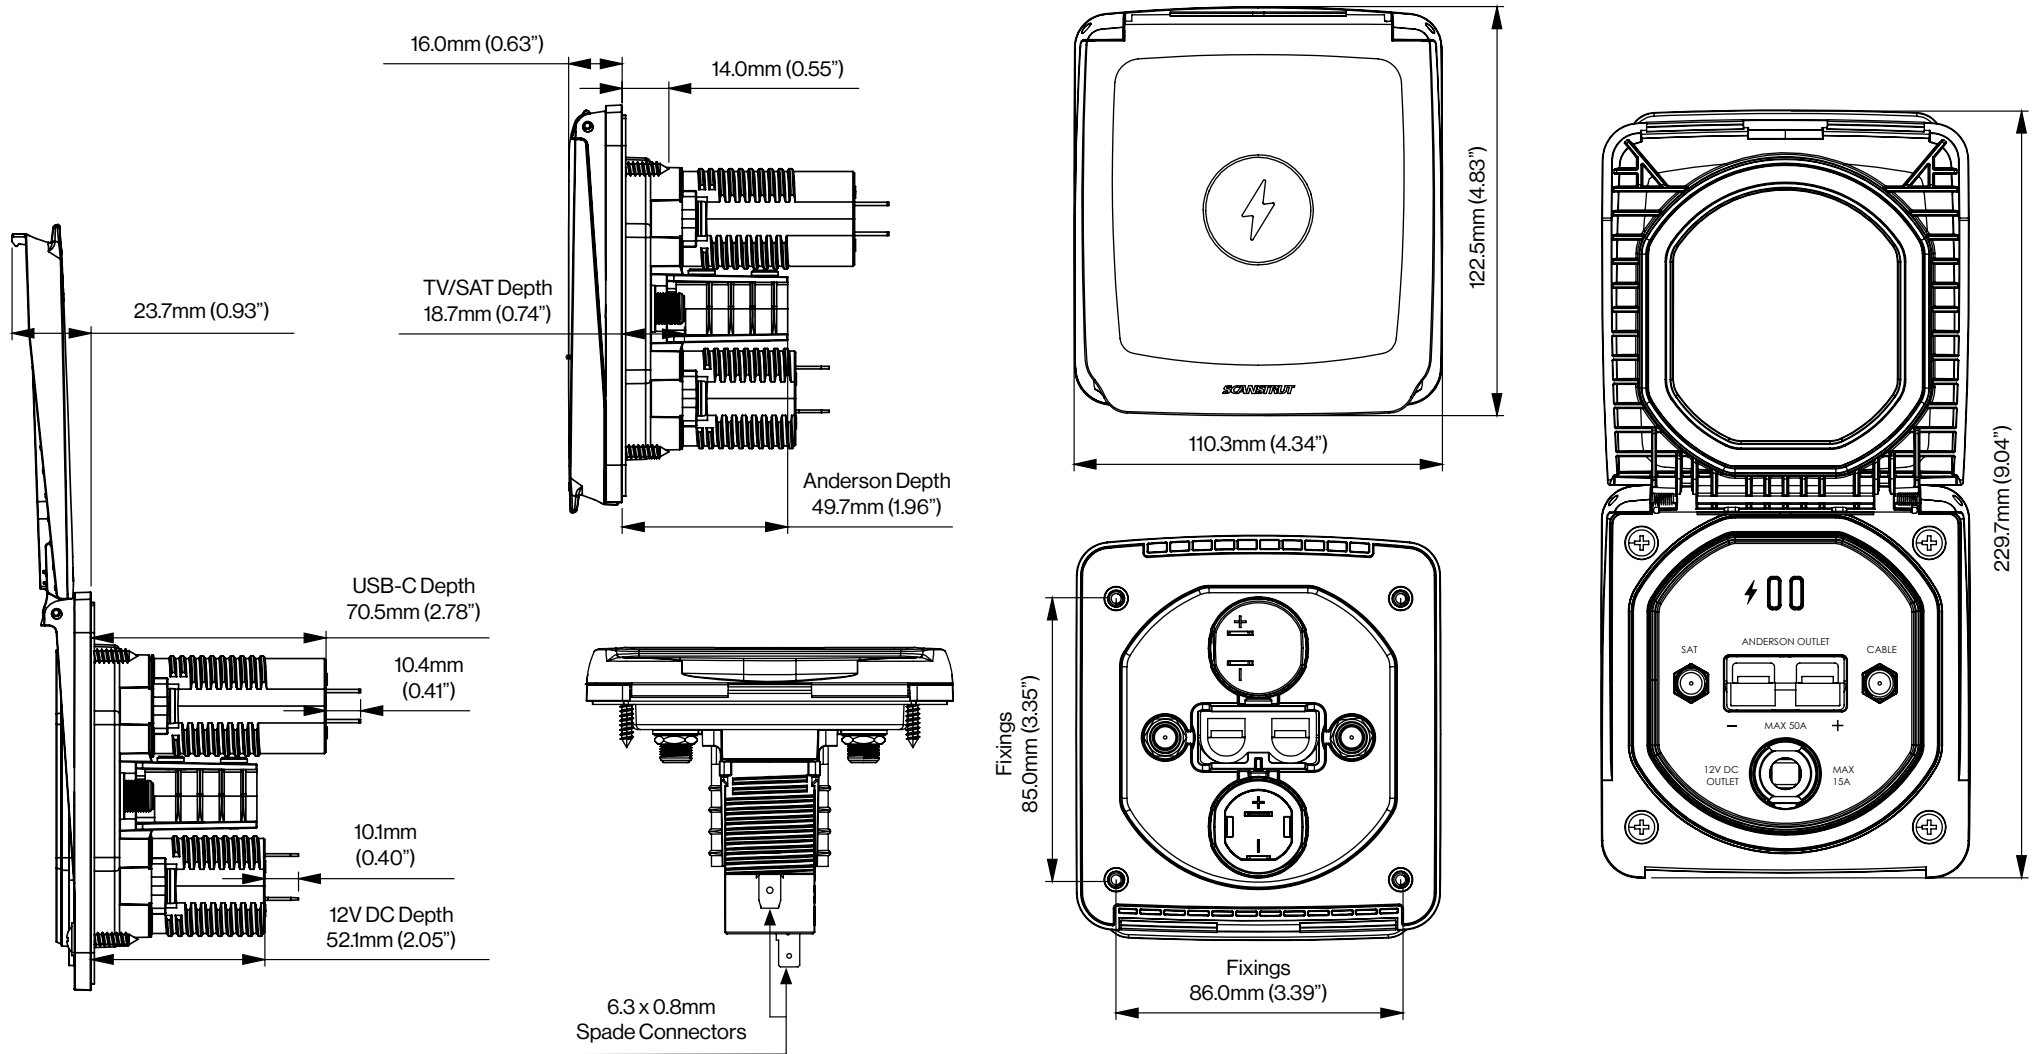

SCANSTRUT

sales@scanstrut.com • usasales@scanstrut.com

TEC-007572