



Roam Series

Quick Connect Hot/Cold Water Outlet

SC-R-W3

Technical Information

Outlet Connection Type	Quick-Connect Nickel Plated Brass Coupling
Rear Connection Type	Monobloc-Type 2x M10x1.00 Hot / Cold Water Feed Ports
Max Water System Pressure	8 BAR (116PSI) Water temperature used with this product should not exceed 50°C (120°F) at the sprayer end.
Hose Type	3m (10ft) Length Coiled PU Material with Nickel Plated Brass Fittings
Hose Diameter	9mm (0.35")
Sprayer Type	• Full Stainless-Steel Construction • Locking Flow Switch • Adjustable Spray Pattern • Silicone Handle Grip
Mixer Type	• Full Satin Brushed 316 Stainless Steel Construction • Flow and Temperature Adjustment Lever • Ceramic Cartridge
Materials in Contact with Water	Stainless Steel, Nickel-Plated Brass (Lead-Free), Ceramic, PU
Waterproof Rating	IP68, IP69K Front only when lid closed
IP Rating	ROHS, REACH, BS EN 1112:2008

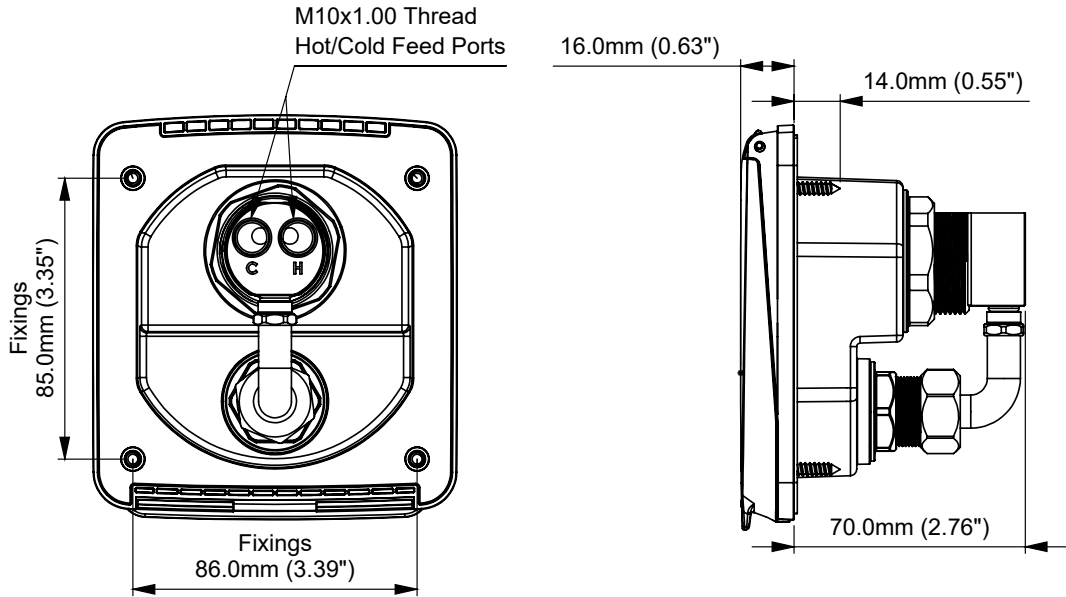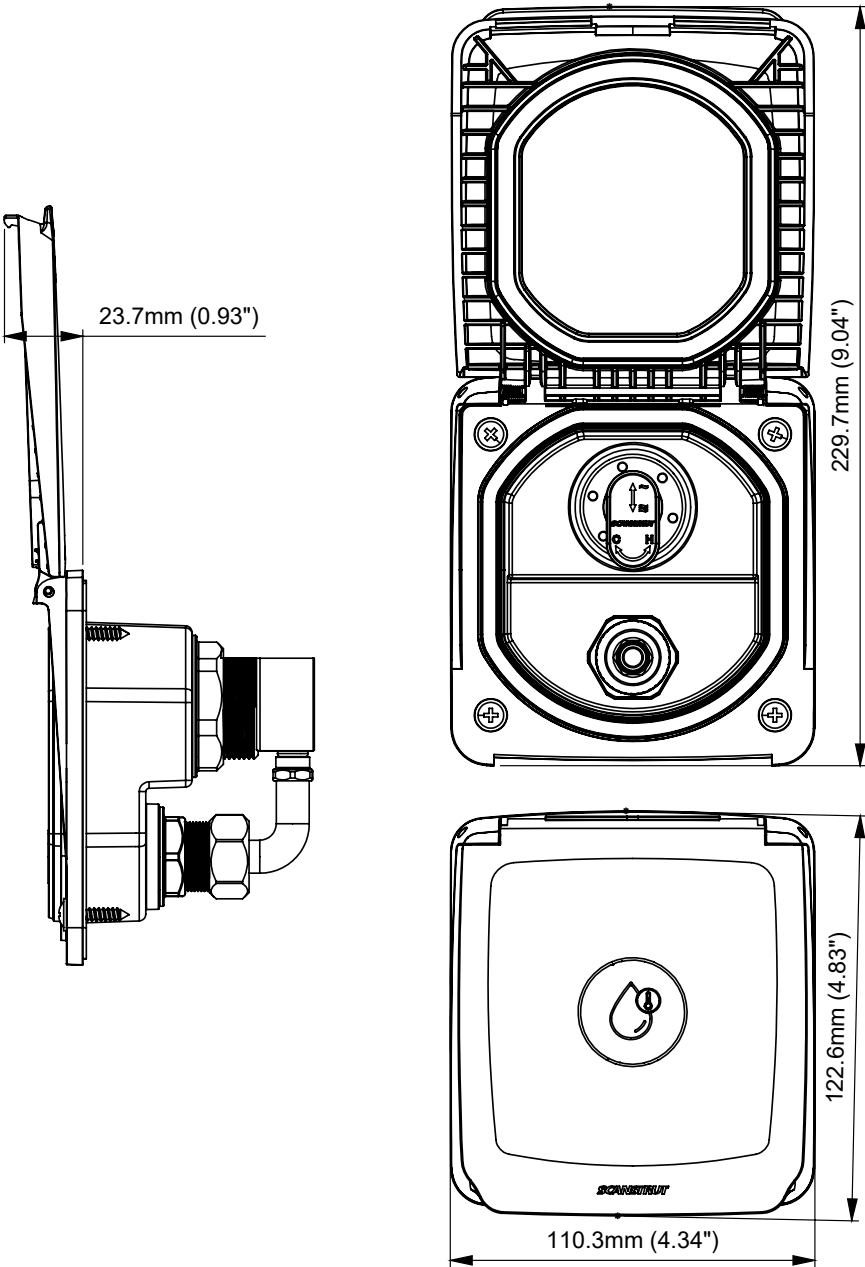

SCANSTRUT.

sales@scanstrut.com • usasales@scanstrut.com


TEC-007570

Roam Series

Quick Connect Hot/Cold Water Outlet

SC-R-W3

Technical Information

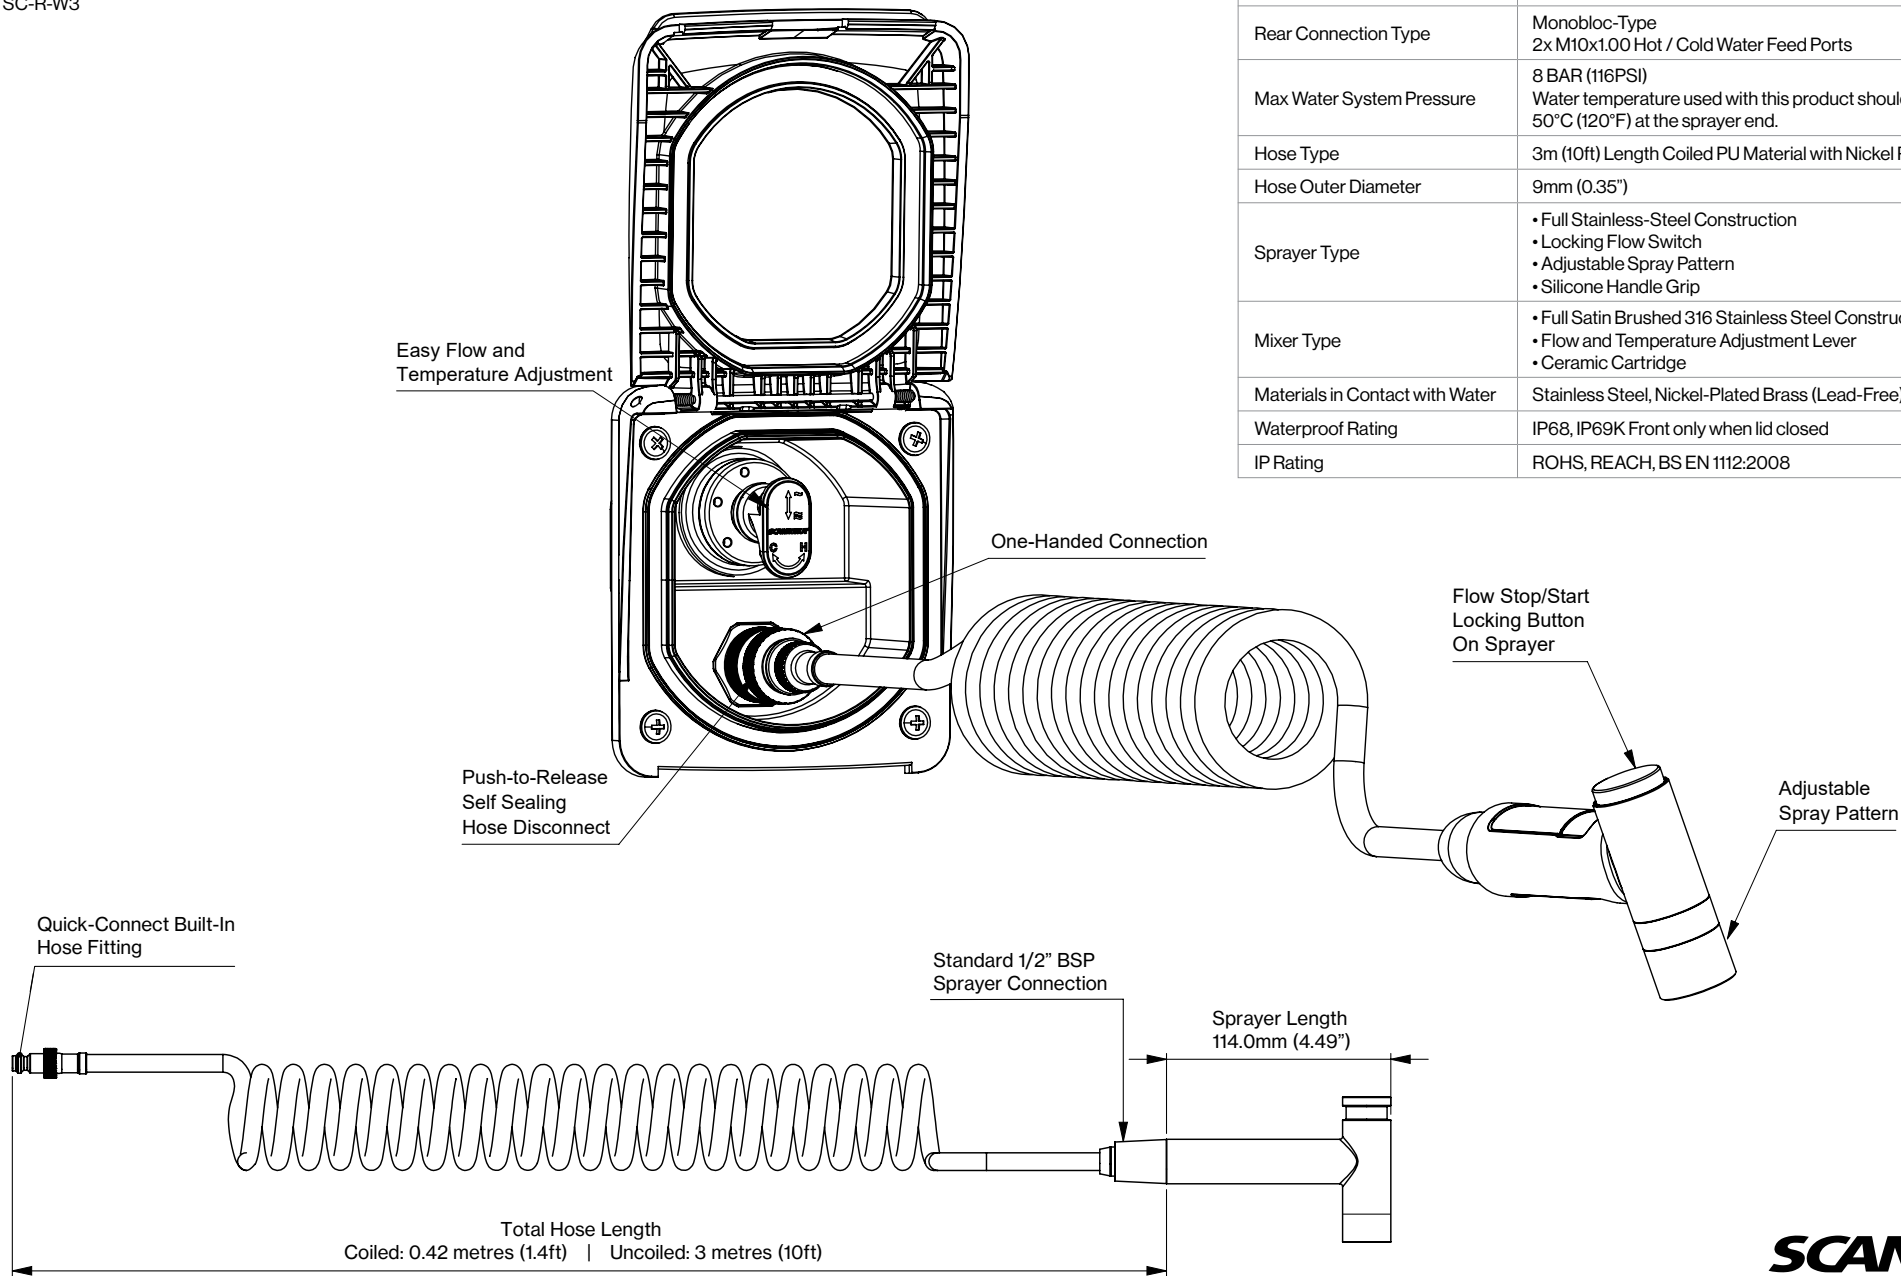

Outlet Connection Type	Quick-Connect Nickel Plated Brass Coupling
Rear Connection Type	Monobloc-Type 2x M10x1.00 Hot / Cold Water Feed Ports
Max Water System Pressure	8 BAR (116PSI) Water temperature used with this product should not exceed 50°C (120°F) at the sprayer end.
Hose Type	3m (10ft) Length Coiled PU Material with Nickel Plated Brass Fittings
Hose Outer Diameter	9mm (0.35")
Sprayer Type	• Full Stainless-Steel Construction • Locking Flow Switch • Adjustable Spray Pattern • Silicone Handle Grip
Mixer Type	• Full Satin Brushed 316 Stainless Steel Construction • Flow and Temperature Adjustment Lever • Ceramic Cartridge
Materials in Contact with Water	Stainless Steel, Nickel-Plated Brass (Lead-Free), Ceramic, PU
Waterproof Rating	IP68, IP69K Front only when lid closed
IP Rating	ROHS, REACH, BS EN 1112:2008